



**FULL HD OVER COAX** USE YOUR EXISTING COAX CABLE

# HDSDI!




- 1/2.86" Panasonic CMOS
- 5.1~51mm Vari-Focal Mega-Pixel Lens
- True Day & Night (ICR)
- DNR (Digital Noise Reduction)

## 1080P 10x OPTICAL ZOOM CAMERA

**2 MEGA PIXEL**  
Up To 1080p

**x22 MORE COVERAGE** than  
Conventional CCTV Camera

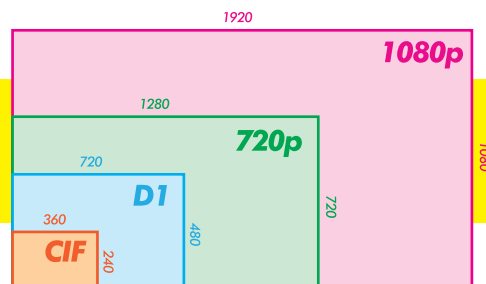

### KEY FEATURES

- HD-SDI Zoom Camera
- 1080p Full HD resolution
- 10x Optical Zoom
- Min. Illuminance 0.5 Lux/0.001 Lux
- HD-SDI & Composite Dual Output
- OSD Menu Control
- DC 12V
- RS-485 (Pelco-D / Pelco-P)



Back View

Camera	Image Sensor	1/2.86" Panasonic CMOS sensor
	Resolution	1920x1080p, 2,000K Pixels
	Zoom Optical	10x & Digital 32x
	Focal Length	F1.6~1.8, f=5.1~51mm
	Angle of View	H : 54°~4.9° , V : 31°~4.0°
	Video Signal to Noise	More than 50 dB(AGC off)
	Focus Control	Auto / Manual / One Push
	AE Mode	Auto / Iris / Shutter / Manual
	AGC	On / Off
	Shutter Speed	1/30(25) ~ 1/60,000 sec
	Iris	0 ~ 20
	DSS	Off / Max x2 ~ x4
	Flickerless	On / Off
	Brightness	0 ~ 20
	White Balance	Auto / One Push / Manual / Indoor / Outdoor
	Day & Night	Auto / Day / Night (ICR) / Ext-In
	Minimum Illuminance	0.5 Lux (Color) / 0.001Lux (B/W, DSS)
	WDR / BLC	OFF / WDR / BLC
	HLC	On / Off
	Defog	On / Off
	Sharpness	0 ~ 10
DNR	Auto / Off / Low / Middle / High	
Motion Detection	3 Positions	
Privacy Zone	24 Mask	
Video	Output	2 x BNC (HD-SDI and CVBS)
	HD-SDI Standard	HDcctv V1.0 / 1.485Gb/s / SMPTE 292M 1080p / 720p
OSD		English, Simplified Chinese, Traditional Chinese, Japanese
Serial Port	Port	RS-485
	Protocol	VISCA / Pelco-D / Pelco-P
Operation Temperature		-10°C ~ 50°C / 14°F ~ 122°F
Dimension		(W)71 x (H)61 x (D)95mm / (W)2.7 x (H)2.4 x (D)3.74inch
Rated Power		DC 12V / 0.5A